

CHERRYMAX® RIVET TOOLING

EXTENSIONS

Combinations of these extensions may be used to reach many restricted installation areas by increasing the overall length of the pulling head.

- 704A12-2** (2") NSN 5130-01-145-0206
- 704A12-4** (4") NSN 5130-01-145-0207
- 704A12-6** (6") NSN 5130-01-145-0208
- 704A12-12** (12") NSN 5130-01-178-0331




These extensions will fit directly on to the G701A, G704B, G749A, G845A and G846 CherryMAX® Riveters and will accept any of the pulling heads listed for those riveters in the Tool Selection Chart on page 29.

- 744B35-2** (2")
- 744B35-4** (4")
- 744B35-6** (6")
- 744B35-12** (12")

Any combination of these extensions may be used to reach the desired length. They fit directly on the G-744 CherryMAX riveters and will accept any of the pulling heads listed for that riveter in the tool selection chart on page 29.

- 753B21** (1-1/8")

This extension increases the overall length of the H753A-456 right angle pulling head nosepiece to approximately 2-3/16", enabling it to reach into more restricted areas.

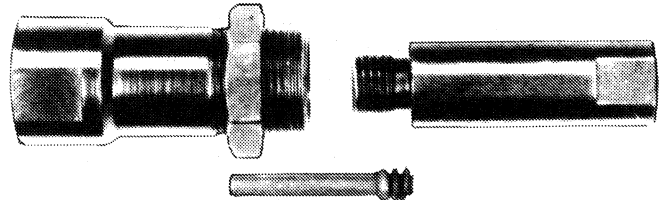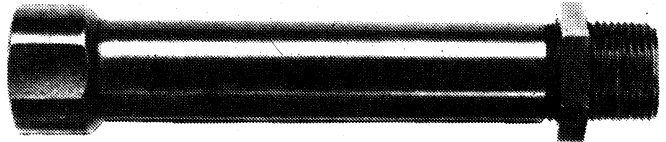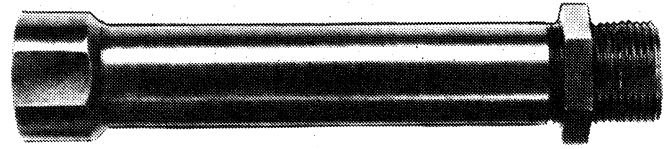

ADAPTERS

These adapters permit various Cherry riveters to accept pulling heads for the installation of CherryMAX rivets that the riveters were not originally intended to pull.

680B205

Permits the G686B-S, G689, G700 and G784 to accept the H753A-456 and H781-456 pulling heads for installing 1/8, 5/32 and 3/16" CherryMAX® rivets.



744A20

Permits the G744 riveter to accept the H701-456, H753-456 and H781-456 pulling heads for installing 1/8, 5/32 and 3/16" CherryMAX® rivets and G846 up to -4 grip wiredraw rivets.



740A26

Permits the G740A and G86A Cherry riveters to accept the H749A-456, H753A-456 and H781-456 pulling heads for installing 1/8, 5/32 and 3/16" CherryMAX® rivets.

