

**REBUILTS
AVAILABLE**

CHERRY RIVETERS


EXPERT REPAIRS ON ALL TYPE CHERRY GUNS

G 36 TYPE HAND RIVETER (#122)



THIS TOOL WILL HANDLE SOME CHERRY KNOB STEM, (MS) SERRATED, CHERRYLOCK OR CHERRYMAX RIVETS WITH APPROPRIATE PULLING HEAD.

PRICE NEW:
(Less Pulling Head)

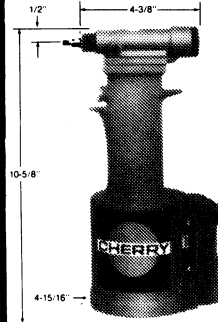

G 715A POWER RIVETER

The Cherry G 715A is a pneumatic tool designed for continuous, reliable performance in production and repair work. It weighs less than 4 lbs., has a 1-1/8" stroke, and a rated pull load of 1400 lbs. @ 90 psi air pressure at the tool.

Pulling heads are not furnished with this tool. They must be ordered separately. Use H9015 pulling heads in the rivet diameter and head style required or series #121.


PRICE NEW: (Less Pulling Head)

PULLING HEADS FOR SERRATED, CHERRYMAX, OR HUCK 9SP RIVETS



- #121-1 - For 1/8"
- #121-2 - For 5/32"
- #121-3 - For 3/16"
- #121-0 - For 3/32"

*For Use On
Model G-36 (#122)
Or G715A
Riveters*

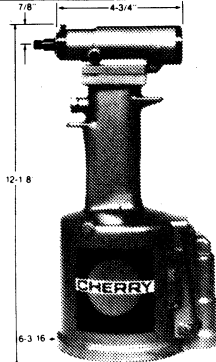

G 740A POWER RIVETER


The Cherry G 740A is a pneumatic/hydraulic tool designed for heavy, continuous use in production and repair work. It weighs less than 6-1/2 lbs., has a 1-1/4" stroke and a rated pull load of 2320 lbs. @ 90 psi air pressure at the tool.

Pulling heads are not furnished with this tool. They must be ordered separately. Use H9040 pulling heads in the rivet diameter and head style required.

H615B AND H640B SERIES CHERRYLOCK PULLING HEAD 1/8"-1/4" SPECIFY UNIVERSAL OR COUNTERSUNK



H9040 SERIES SERRATED STEM PULLING HEADS 1/8"-3/16" SPECIFY UNIVERSAL OR COUNTERSUNK




HAND NIPPER




For Flush Trimming Cherry Rivets No. 209.....

269C3 GRIP GAGE.....




A simple, self-explanatory gage for determining material thickness and proper rivet grip length.

CHERRY LOCK RIVETERS

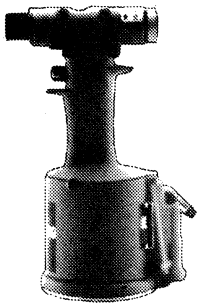

G 784 HYDRO-SHIFT RIVETER
H681 SERIES PULLING HEADS FIT DIRECTLY ON THIS TOOL TO INSTALL BOTH BULBED AND STANDARD CHERRYLOCK RIVETERS


PRICE REBUILT
Also Available Model G 684 -REC



G 695B RIGHT ANGLE RIVETER
H690 SERIES PULLING HEADS FIT DIRECTLY ONTO THIS TOOL TO INSTALL BOTH BULBED AND STANDARD CHERRYLOCK RIVETERS

G 686B S SPLIT RIVETER ALSO AVAILABLE

H681 SERIES



PRICE NEW:

H680B200A PULLING HEADS



The H680B200 Pulling Head is designed to enable the Cherrylock hydroshift riveting tools, such as G-684, G-685S, G-686S, G-689, G-700 and G-784 to install CherryMAX rivets.

PRICE NEW:

RIVET DIAMETER	PULLING HEAD NUMBER	DIMENSIONS	
		A	B
1/8"	H681-4U Universal Head	.250	.359
	H681-4C Countersunk Head	.208	.341
5/32"	H681-5U Universal Head	.313	.377
	H681-5C Countersunk Head	.269	.352
3/16"	H681-6U Universal Head	.375	.419
	H681-6C Countersunk Head	.335	.385
1/4"	H681-8U Universal Head	.500	.452
	H681-8C Countersunk Head	.458	.398