

AIRCRAFT DRILL BITS (COBALT) PER NAS907 SPECIFICATIONS TYPE J

DEDUCT 10%
WHEN ORDERING
STANDARD PACK


JOBBER'S LENGTH



135°SP

R18C	R10C
#5	1/16
#10	3/32
#16	1/8
#20	5/32
#21	3/16
#27	1/4
#30	5/16
#40	3/8

12" AIRCRAFT EXTENSION



135°SP

CO 501-12	CO 500-12
#5	1/16
#10	3/32
#16	1/8
#20	5/32
#21	3/16
#27	1/4
#30	
#40	

6" AIRCRAFT EXTENSION



135°S/P

CO 501-6	CO 500-6
#5	1/16
#10	3/32
#16	1/8
#20	5/32
#21	3/16
#27	1/4
#30	
#40	

COBALT JOBBER'S LENGTH SET


Cobalt High Speed Steel,
Surface Treated

Fractional Sizes,
Wire Sizes

CB15-H
15 Pc. Set in Metal Index
1/16-1/2" by 32nds

CB29-H
29 Pc. Set in Metal Index
1/16-1/2" by 64ths

CB60-H
60 Pc. Set in Metal Index
1-60

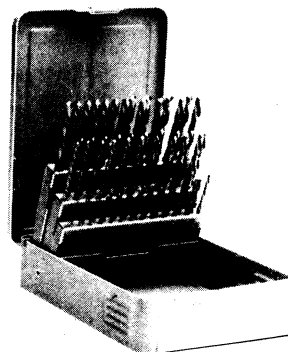

DRILL STOPS



KWIK-LOK manufactures a unique tool designed to reduce drill bit breakage. These drill stops have coiled spring to cushion the drill break-through. Rounded smooth face eliminates marking and prevents the chuck jaws from marring the surface.

PART NO.	COLOR CODE
KDS 50	Black
KDS 40	Zinc
KDS 30	Copper
KDS 21	Black
KDS 20	Zinc
KDS 10	Brass
KDS 1/4	Copper
KDS 5/16	Copper

PILOT BRUSHES

STAINLESS	PILOT DIA	DIA	WIRE SIZE	TRIM LENGTH FROM RING
06721	3/32	1/2	.004	1/8
06741	1/8	1/2	.004	1/8
06761	5/32	1/2	.004	1/8
06781	3/16	1/2	.004	1/8
06801	1/4	1/2	.004	1/8



Stem Diameter-1/4" Max. Safe Speed 8,000 R.P.M.

Used for cleaning paint, dirt, rust or varnish from around rivet and bolt holes. By placing the pilot pin in the rivet or bolt hole the cleaning action is confined. Assures a positive electrical contact to eliminate static electricity buildup.