

CLECO - NO. 8 ROLLING IMPULSE SCREWDRIVERS

Lever Handle

Torque Range: 7 to 75 in. lbs. (.8 to 8.5 Nm)


Adjustable Rolling Impulse Clutch Screwdrivers

FEATURES

- Higher speed in a more compact size assures easier handling, less operator fatigue
- Rolling impulse clutch provides smoother rolling action on seated fasteners
- Low sound levels
- Family concept gives maximum parts interchangeability for lower spare parts inventory
- Greater durability from:
 - Heat-treated, high quality alloy steel gearing
 - Heat-treated steel motor bearing plates
 - Three idler planetary gearing for all gear reductions
- Six 1/4 in steel ball, 12 detent clutch design
- External clutch adjustment on Q models
- Heavy-duty lever is secured to steel exhaust deflector for greater strength
- Tool design permits operation without air line lubrication. Specifications are based on 90 psig lightly lubricated air.

SPECIFICATIONS

MODEL	HANDLE STYLE	FREE SPEED rpm	TORQUE RANGE (SOFT PULL)		SCREW SIZE Min. to Max.	OVERALL LENGTH		WEIGHT		DRIVE
			in. lb.	Nm		in.	mm	lb.	Kg	
8RSCL-7 8RSCL-7BQ	Reversible Lever	550	7-75	.8-8.5	No. 5 to 1/4 in.	11 10 ³ / ₈	279 264	2 1/2 2 1/2	1.13 1.13	Bit and Finder Type Quick Change Chuck
8RSCL-10 8RSCL-10BQ		800	7-65	.8-7.3	No. 5 to No. 12	11 10 ³ / ₈	279 264	2 1/2 2 1/2	1.13 1.13	Bit and Finder Type Quick Change Chuck
8RSCL-20 8RSCL-20BQ		1800	7-40	.8-4.5	No. 5 to No. 12	10 1/4 9 5/8	260 244	2 1/4 2 1/4	1.02 1.02	Bit and Finder Type Quick Change Chuck
8RSCL-30 8RSCL-30BQ		2500	7-30	.8-3.4	No. 5 to No. 10	10 1/4 9 5/8	260 244	2 1/4 2 1/4	1.02 1.02	Bit and Finder Type Quick Change Chuck
8RSCL-40 8RSCL-40BQ		3200	7-26	.8-3.2	No. 5 to No. 10	10 1/4 9 5/8	260 244	2 1/4 2 1/4	1.02 1.02	Bit and Finder Type Quick Change Chuck
8SCL-10 8SCL-10BQ	Non-Reversible Lever	1000	7-67	.8-7.6	No. 5 to No. 12	10 3/4 10 1/8	273 257	2 3/8 2 3/8	1.08 1.08	Bit and Finder Type Quick Change Chuck
8SCL-20 8SCL-20BQ		2000	7-42	.8-4.7	No. 5 to No. 12	10 9 3/8	254 238	2 1/8 2 1/8	.96 .96	Bit and Finder Type Quick Change Chuck
8SCL-30 8SCL-30BQ		3000	7-32	.8-3.6	No. 5 to No. 10	10 9 3/8	254 238	2 1/8 2 1/8	.96 .96	Bit and Finder Type Quick Change Chuck

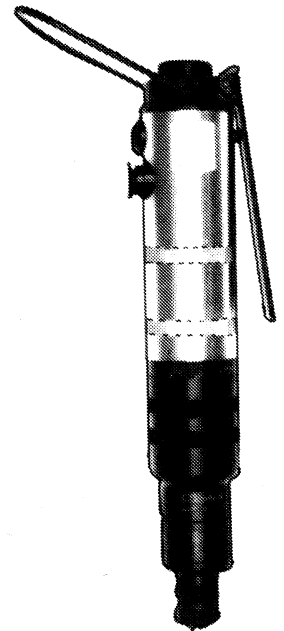

8RSCL-20BQ

SPECIFICATIONS

MODEL	HANDLE STYLE	FREE SPEED rpm	TORQUE RANGE (SOFT PULL)		SCREW SIZE Min. to Max.	OVERALL LENGTH		WEIGHT		DRIVE
			in. lb.	Nm		in.	mm	lb.	Kg	
8RSCP-7B 8RSCP-7BQ	Reversible Pistol Grip with Underslung Handle	550	7-75	.8-8.5	No. 5 to 1/4 in.	9 7/8 9 1/4	251 235	3 3	1.36 1.36	Bit & Finder Type Quick Change Chuck
8RSCP-10B 8RSCP-10BQ		800	7-65	.8-7.3	No. 5 to No. 12	9 7/8 9 1/4	251 235	3 3	1.36 1.36	Bit & Finder Type Quick Change Chuck
8RSCP-20B 8RSCP-20BQ		1800	7-40	.8-4.5	No. 5 to No. 12	9 1/8 8 1/2	232 216	2 3/4 2 3/4	1.25 1.25	Bit & Finder Type Quick Change Chuck
8RSCP-30B 8RSCP-30BQ		2500	7-30	.8-3.4	No. 5 to No. 10	9 1/8 8 1/2	232 216	2 3/4 2 3/4	1.25 1.25	Bit & Finder Type Quick Change Chuck
8RSCP-40B 8RSCP-40BQ		3200	7-26	.8-2.9	No. 5 to No. 10	9 1/8 8 1/2	232 216	2 3/4 2 3/4	1.25 1.25	Bit & Finder Type Quick Change Chuck
8RSCO-7B 8RSCO-7BQ	Push Button Reverse with Offset Handle	550	7-75	.8-8.5	No. 5 to 1/4 in.	10 1/2 9 7/8	268 251	2 7/8 2 7/8	1.30 1.30	Bit & Finder Type Quick Change Chuck
8RSCO-10B 8RSCO-10BQ		800	7-63	.8-7.1	No. 5 to No. 12	10 1/2 9 7/8	268 251	2 7/8 2 7/8	1.30 1.30	Bit & Finder Type Quick Change Chuck
8RSCO-20B 8RSCO-20BQ		1800	7-40	.8-4.5	No. 5 to No. 12	9 3/4 9 1/8	248 232	2 5/8 2 5/8	1.19 1.19	Bit & Finder Type Quick Change Chuck
8RSCO-30B 8RSCO-30BQ		2500	7-30	.8-3.4	No. 5 to No. 10	9 3/4 9 1/8	248 232	2 5/8 2 5/8	1.19 1.19	Bit & Finder Type Quick Change Chuck
8RSCO-40B 8RSCO-40BQ		3200	7-26	.8-2.9	No. 5 to No. 10	9 3/4 9 1/8	248 232	2 5/8 2 5/8	1.19 1.19	Bit & Finder Type Quick Change Chuck

PERFORMANCE RATED AT 90 PSIG (6.2 BAR) AIR PRESSURE.

AIR INLET: 1/4 N.P.T.

MINIMUM HOSE SIZE: 1/4 IN.

SIDE TO CENTER DISTANCE: 49/64 IN. (19.5 MM)

NOTE: LENGTH AND WEIGHT OF BIT AND FINDER TYPE TOOLS INCLUDES STANDARD LENGTH BIT & FINDER.

DRIVE: 1/4 IN. FEMALE HEX.


TORQUE SPRINGS FOR NO. 8 SCREWDRIVERS

SPRING COLOR	TORQUE RANGE		CODE NUMBER
	in. lbs.	Nm	
Blue	7-25	.8-2.8	869203-0
Green	15-75	1.7-8.5	867938-3

ALL MODELS EQUIPPED WITH GREEN SPRING. ONE EXTRA SPRING PROVIDED AS STANDARD EQUIPMENT IF SPECIFIED.

EQUIPMENT LIST

STANDARD EQUIPMENT:
Operating Instructions and Service Manual
Suspension Bail (412603-3)
STANDARD EQUIPMENT IF SPECIFIED:
One extra torque spring other than green spring
OPTIONAL EXTRA CHARGE:
1/4 in. x 8ft. Hose Whip (881283-6)
Dead Handle (861006-5)
Any other Accessory shown on Screwdriver Accessory page
1/4 in. x 8 ft. Polyurethane Hose Whip (201696-2)

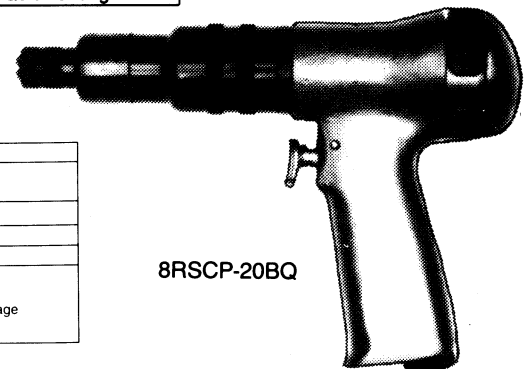

8RSCP-20BQ