


REVERSING SCREWDRIVERS & NUTRUNNERS

REBUILTS AVAILABLE


EXPERT REPAIR ON ALL MODELS

Model SG023A-
Model SG053A-

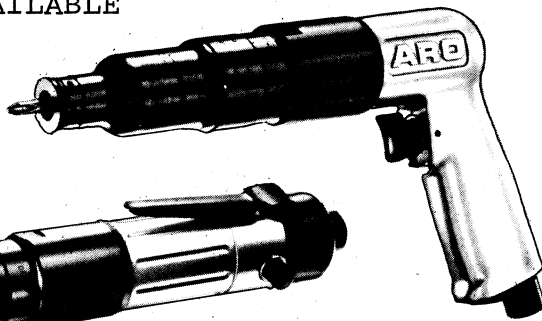

Model SL023A-
Model SL053A-

1. Add "Q" to the base model number for a Quick-Change Sleeve. Example: SG052A-10-Q



Series 20 (1 - 30 lb. in. torque output)

| MODEL | CLUTCH | FREE SPEED rpm | STALL TORQUE | TORQUE OUTPUT Soft Draw lb. in. (Nm) | | | SOUND LEVEL dB(A) | SIDE TO CENTER in. (mm) | LENGTH in. (mm) | WEIGHT lb. (kg) |
|-----------------------|--------------------|-------------------|-----------------|-----------------------------------------|----------------|-----------------|-------------------------|-------------------------------|--------------------|--------------------|
| | | | | CLUTCH SPRINGS | | | | | | |
| | | | | 46349 Blue | 46405 White | 36512 Yellow | | | | |
| PISTOL GRIP | | | | | | | | | | |
| SG021B-9 | Direct Drive | 900 | 38 (4.3) | — | — | — | 76 | 0.6 (15) | 5.2 (131) | 1.3 (.6) |
| SG021B-15 | | 1500 | 25 (2.8) | — | — | — | | | 5.2 (131) | 1.3 (.6) |
| SG021B-26 | | 2600 | 12 (1.4) | — | — | — | | | 4.8 (122) | 1.2 (.5) |
| SG023B-9 | Adjustable Ball | 900 | — | 8-30 (9-3.4) | 4-13 (5-1.5) | 2-6 (.2-7) | 76 | 0.6 (15) | 7.2 (182) | 1.7 (.8) |
| SG023B-15 | | 1500 | — | — | 4-13 (5-1.5) | 2-6 (.2-7) | | | 7.2 (182) | 1.7 (.8) |
| SG023B-26 | | 2600 | — | — | — | 2-6 (.2-7) | | | 6.8 (173) | 1.6 (.7) |
| LEVER THROTTLE | | | | | | | | | | |
| SL021B-9 | Direct Drive | 900 | 38 (4.3) | — | — | — | 76 | 0.6 (15) | 6.7 (170) | 1.0 (.5) |
| SL021B-15 | | 1500 | 25 (2.8) | — | — | — | | | 6.7 (170) | 1.0 (.5) |
| SL021B-26 | | 2600 | 12 (1.4) | — | — | — | | | 6.3 (160) | 0.9 (.4) |
| SL023B-9 | Adjustable Ball | 900 | — | 8-30 (9-3.4) | 4-13 (5-1.5) | 2-6 (.2-7) | 76 | 0.6 (15) | 8.7 (220) | 1.3 (.6) |
| SL023B-15 | | 1500 | — | — | 4-13 (5-1.5) | 2-6 (.2-7) | | | 8.7 (220) | 1.3 (.6) |
| SL023B-26 | | 2600 | — | — | — | 2-6 (.2-7) | | | 8.3 (211) | 1.2 (.5) |

Series 50 (10 - 120 lb. in. torque output)

| MODEL | CLUTCH | FREE SPEED rpm | STALL TORQUE | TORQUE OUTPUT Soft Draw lb. in. (Nm) | | | | SOUND LEVEL dB(A) | SIDE TO CENTER in. (mm) | LENGTH in. (mm) | WEIGHT lb. (kg) |
|-----------------------|--------------------|-------------------|-----------------|-----------------------------------------|-----------------|-----------------|-----------------|-------------------------|-------------------------------|--------------------|--------------------|
| | | | | CLUTCH SPRINGS | | | | | | | |
| | | | | 46473 Gray | 46728 Blue | 47067 White | 47066 Yellow | | | | |
| PISTOL GRIP | | | | | | | | | | | |
| SG051B-8 | Direct Drive | 800 | 120 (13.6) | — | — | — | 78 | 0.8 (21) | 7.4 (187) | 2.4 (1.1) | |
| SG051B-10 | | 1000 | 90 (10.2) | — | — | — | | | 7.4 (187) | 2.4 (1.1) | |
| SG051B-17 | | 1700 | 65 (7.3) | — | — | — | | | 7.4 (187) | 2.4 (1.1) | |
| SG051B-25 | | 2500 | 45 (4.0) | — | — | — | | | 6.9 (175) | 2.2 (1.0) | |
| SG053B-8 | Adjustable Ball | 800 | — | 45-100 (5.1-11.3) | 20-80 (2.3-9.0) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | 78 | 0.8 (21) | 9.4 (238) | 3.1 (1.5) |
| SG053B-10 | | 1000 | — | — | 20-80 (2.3-9.0) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | | | 9.4 (238) | 3.1 (1.5) |
| SG053B-17 | | 1700 | — | — | 15-60 (1.7-6.8) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | | | 9.4 (238) | 3.1 (1.5) |
| SG053B-25 | | 2500 | — | — | — | 10-40 (1.1-4.5) | 10-35 (1.1-4.0) | | | 8.9 (226) | 2.9 (1.4) |
| LEVER THROTTLE | | | | | | | | | | | |
| SL051B-8 | Direct Drive | 800 | 120 (13.6) | — | — | — | 78 | 0.82 (22) | 8.9 (225) | 2.3 (1.1) | |
| SL051B-10 | | 1000 | 90 (10.2) | — | — | — | | | 8.9 (225) | 2.3 (1.1) | |
| SL051B-17 | | 1700 | 65 (7.3) | — | — | — | | | 8.9 (225) | 2.3 (1.1) | |
| SL051B-25 | | 2500 | 45 (4.0) | — | — | — | | | 8.1 (206) | 2.1 (1.0) | |
| SL053B-8 | Adjustable Ball | 800 | — | 45-100 (5.1-11.3) | 20-80 (2.3-9.0) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | 78 | 0.82 (22) | 10.9 (227) | 2.9 (1.4) |
| SL053B-10 | | 1000 | — | — | 20-80 (2.3-9.0) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | | | 10.9 (227) | 2.9 (1.4) |
| SL053B-17 | | 1700 | — | — | 15-60 (1.7-6.8) | 15-50 (1.7-5.7) | 10-35 (1.1-4.0) | | | 10.9 (227) | 2.9 (1.4) |
| SL053B-25 | | 2500 | — | — | — | 10-40 (1.1-4.5) | 10-35 (1.1-4.0) | | | 10.4 (264) | 2.7 (1.3) |