


# PYLES SEALANT GUNS

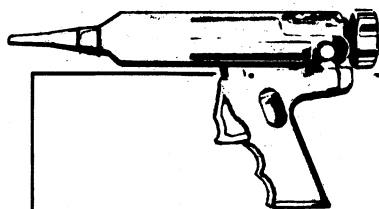

## AIR OPERATED SEALANT GUN KITS

- Model 12053A 2-1/2oz. ....
- Model 12054A 6oz. ....
- Model 12055A 12oz. ....

All kits include an air hose; pistol grip gun; six cartridges, plunger, caps and value protectors; and a selection of nozzles.


**NOTE:** Must specify type of airline connector

### AIR HOSE ASSEMBLIES

- 910-x-x-x-A- Aro Connector and "B" Nut .....
- 920-x-x-x-A- Hansen Connector and "B" Nut .....
- 930-x-x-x-A- Schrader Connector and "B" Nut .....

Specify length required by adding number of inches to the part number. Example: A 10 foot long hose with an Aro Connector is 910-120-A (5, 10, 15, 20, foot length standard).

### HOSE CONNECTORS

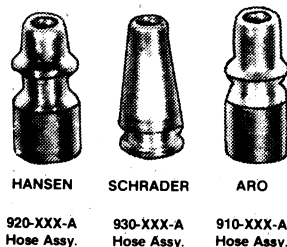

HANSEN 920-XXX-A Hose Assy.    SCHRADER 930-XXX-A Hose Assy.    ARO 910-XXX-A Hose Assy.



## AIR OPERATED SEALANT GUN


Operate on air line pressures of from 5 to 150 p.s.i.

Pyles 950 Series Sealant Guns are manufactured from the highest quality materials to assure long life and easy, dependable operation. Gun bodies and handles are made of durable, lightweight aluminum. The corrosion resistant retainers are made of a special high strength steel to prevent a cartridge splitting under high pressures. To load, simply turn the knob and disengage the retainer. Insert the filled cartridge, replace the retainer with cartridge and then tighten the knob. To operate, simply pull the trigger to open the air valve. Air enters through the valve and forces the plunger down the inside of the cartridge displacing material out the nozzle. The result is a smooth uniform flow of material applied exactly where you want it. Each gun includes one retainer, cartridge and plunger.

Model	Capacity Oz.	Handle Type
950-25 A	2 1/2	PALM
950-25 HA	2 1/2	PISTOL
950-60 A	6	PALM
950-60 HA	6	PISTOL
950-120 A	12	PALM
950-120 HA	12	PISTOL

**NOTE:** Tool includes one cartridge, plunger & retainer. Order air hose separately.

## MANUAL SEALANT GUN

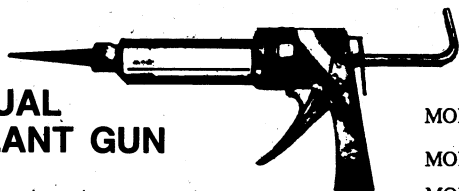

Pyles manual gun has a smooth plunger rod. A simple touch on the lever releases pressure instead of difficult twisting and turning of the rod. Since there are no rod notches, you can dispense any amount of material. Threaded collar holds cartridge. Gun does not include cartridge or nozzle. Two models have different rod lengths for different size cartridges.

- MODEL 1832-6 for 2-1/2 and 6 ounce cartridges ....
- MODEL 1832-12 for 12 ounce cartridges .....
- MODEL 12050 - Includes 1832-6 manual gun, assorted nozzels and six 2-1/2 oz. cartridges.....
- MODEL 12051 - Includes 1832-6 manual gun, assorted nozzels and six 6 oz. cartridges.....
- MODEL 12052 - Includes 1832-12 manual gun, assorted nozzels and six 12 oz. cartridges.....

## COUNTERBORE NOZZLE



- #16000-125.....
- #16000-156.....
- #16000-187.....
- #16000-250.....


For Dispensing sealant into Rivet Hole

## COUNTERBORE DISPENSER

Military and aircraft specifications require that each rivet or bolt hole in an aircraft be sealed by coating the hole and head seat with an approved material, usually "A" Class polysulfide.

Pyles 16000 series counterbore dispensers thread into the outlet of a 950 cartridge. When inserted into a hole and pressed, the dispenser releases the sealant covering both hole and seat. The dispenser includes external threads for automated dispensing with drilling machines. The dispensers are available in 3 sizes to speed and simplify your sealing operation.

Counterbore dispensers may be used with 2 1/2, 6, or 12 ounce size cartridges.

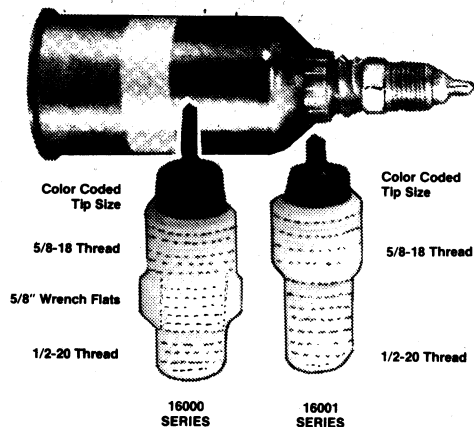

Color Coded Tip Size  
5/8-18 Thread  
5/8" Wrench Flats  
1/2-20 Thread

16000 SERIES      16001 SERIES

PART #	TIP SIZE	COLOR
16000-125 & 16001-125	1/8" dia.	Blue
16000-156 & 16001-156	5/32" dia.	Black
16000-187 & 16001-187	3/16" dia.	White

TIP - 6 Equally Spaced Outlets (.046" Dia.)